

Illustrative picture

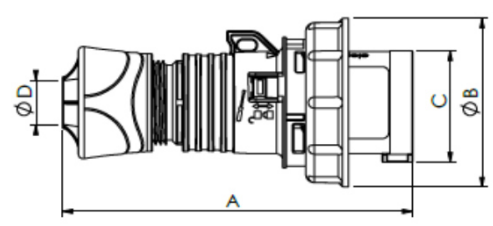
SPECIFICS

Description	Product type	Movable plug low voltage 50/60 Hz IP67
	Article code	8414
	Commercial Series	SERIES 10 IEC 309 IP67

General Data	Poles	N° 3P+E	Type of material	Halogen free						
	Current	A 32	Type of terminal	Screw PH2						
	Voltage	V~ 380-415	Terminal inlet diameter	mm 4,6						
	Earth contact position	h 6	Cable clamp tightening capacity	mm 11,5 - 20						
	Degree of protection	IP 67	Dimensional stability	°C -25 /+70						
	Impact Resistance	IK 8	Resistance glow wire test	°C +650 / +850						
	Insulation Resistance	MΩ >10	Working temperature	°C -25 + 55						
	Dimensions LxDxH	cm 15,8x9,8x9,8	Weight	kg 0,251						
	Behaviour with chemical and atmospheric agents									
Saline Solution	Acids		Bases		Solvents				Mineral Oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistant	Resistant	Resistant	Resistant	Limited Resistant	Limited Resistant	Resistant	Resistant	Resistant	Resistant

Standards	CEI EN 60309-1	CEI EN 60309-2	2014/35/UE
-----------	----------------	----------------	------------

Features package	Descriptions		N/pieces	Weight/kg
	Article		1	0,251
	Package innerbox		4	1,094
	Packaging		60	17,03

Dimensions																																															
	<table border="1"> <thead> <tr> <th>Amp</th><th colspan="3">16A</th><th colspan="3">32A</th></tr> <tr> <th>Poles</th><th>3</th><th>4</th><th>5</th><th>3</th><th>4</th><th>5</th></tr> </thead> <tbody> <tr> <td>A</td><td>140</td><td>140</td><td>140</td><td>161</td><td>161</td><td>161</td></tr> <tr> <td>B</td><td>71</td><td>77</td><td>87</td><td>92</td><td>92</td><td>98</td></tr> <tr> <td>C</td><td>46.5</td><td>53.5</td><td>60.5</td><td>62.5</td><td>62.5</td><td>69.5</td></tr> <tr> <td>D</td><td>6-15</td><td>6-15</td><td>8-16</td><td>11.5-20</td><td>11.5-20</td><td>11.5-22</td></tr> </tbody> </table>						Amp	16A			32A			Poles	3	4	5	3	4	5	A	140	140	140	161	161	161	B	71	77	87	92	92	98	C	46.5	53.5	60.5	62.5	62.5	69.5	D	6-15	6-15	8-16	11.5-20	11.5-20
Amp	16A			32A																																											
Poles	3	4	5	3	4	5																																									
A	140	140	140	161	161	161																																									
B	71	77	87	92	92	98																																									
C	46.5	53.5	60.5	62.5	62.5	69.5																																									
D	6-15	6-15	8-16	11.5-20	11.5-20	11.5-22																																									



Rev	Date	Technical Manager
01	7/IV/20	Romano Rivi

CERTIFICATO N° 9105.ROS3 - UNI EN ISO 9001:2015

Reg. A.E.E.n° IT17100000010057