


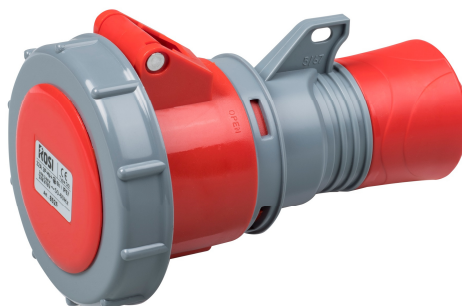

Illustrative picture

SPECIFICS

Description	Product type	Movable socket low voltage 50/60 Hz IP67
	Article code	8525
	Commercial Series	SERIES 11 IEC 309 IP67

General Data	Poles	N° 3P+N+E	Type of material	Halogen free						
	Current	A 32	Type of terminal	Screw PH2						
	Voltage	V~ 200/346-240/415	Terminal inlet diameter	mm 4,6						
	Earth contact position	h 6	Cable clamp tightening capacity	mm 11,5 - 20						
	Degree of protection	IP 67	Dimensional stability	°C -25 /+70						
	Impact Resistance	IK 8	Resistance glow wire test	°C +650 / +850						
	Insulation Resistance	MΩ >10	Working temperature	°C -25 + 55						
	Dimensions LxDxH	cm 16,8x10,2x10,2	Weight	kg 0,338						
	Behaviour with chemical and atmospheric agents									
Saline Solution	Acids		Bases		Solvents				Mineral Oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistant	Resistant	Resistant	Resistant	Limited Resistant	Limited Resistant	Resistant	Resistant	Resistant	Resistant

Standards	CEI EN 60309-1	CEI EN 60309-2	2014/35/UE
-----------	----------------	----------------	------------

Features package	Descriptions		N/pieces	Weight/kg
	Article		1	0,338
	Package innerbox		3	1,104
	Packaging		45	17,18

Dimensions

Technical drawing of a 3-phase industrial plug. The drawing shows the plug from a side profile. Dimension A is the total length of the plug. Dimension B is the height of the plug body. Dimension C is the diameter of the plug body. The plug has a threaded section and a locking mechanism.

Amp Poles	16A			32A		
	3	4	5	3	4	5
A	153	152	154	168	168	168
B	79	85	95	97	99	106
C	6-15	6-15	8-16	11.5-20	11.5-20	11.5-22



Rev	Date	Technical Manager
01	7/1/20	Romano Rivi

CERTIFICATO N° 9105.ROS3 - UNI EN ISO 9001:2015

Reg. A.E.E.n° IT17100000010057